


# JB330



## RJB Heavy Industries Ltd.

Mailing Address: #133 8-6014 Vedder Rd,  
Chilliwack, BC V2R5P5 Canada  
Office: + 1 604 807 0195  
WhatsApp/Cellular: + 1 604 789 0195  
info@rjbhi.com  
rjbhi.com

|                     |                   |
|---------------------|-------------------|
| ■ OPERATING WEIGHT: | 32800kg           |
| ■ ENGINE POWER:     | 209kW             |
| ■ BUCKET CAPACITY:  | 1.6m <sup>3</sup> |
| ■ TRAVEL SPEED:     | 3.4/5.2km/h       |

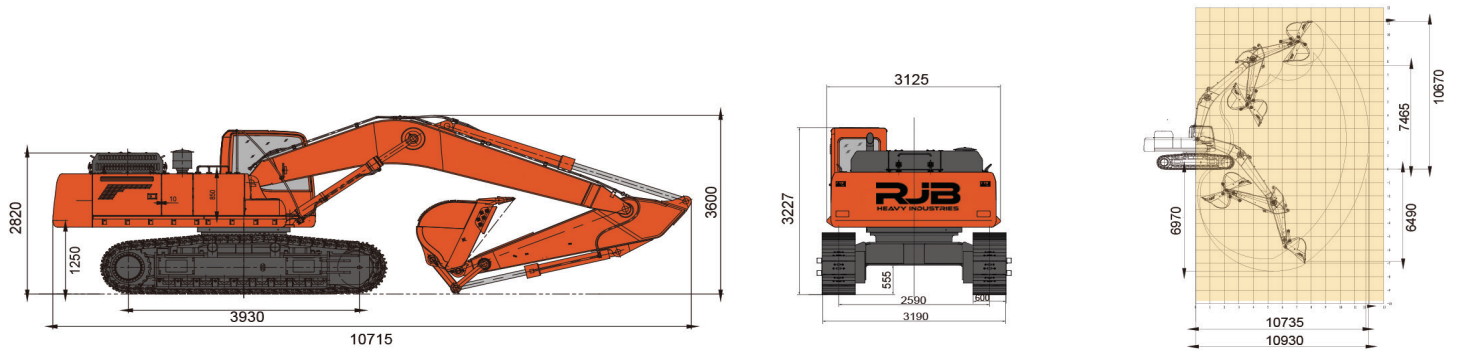

## TECHNICAL PARAMETERS

|           | ITEM                     | UNIT           | CDM6336     |
|-----------|--------------------------|----------------|-------------|
| Basic     | Operating weight         | kg             | 32800       |
|           | Boom length              | mm             | 6150        |
|           | Arm length               | mm             | 3200        |
|           | Standard bucket          | m <sup>3</sup> | 1.65 (Rock) |
|           | Max.Travel speed         | km/h           | 3.6/6       |
|           | Max.Swing speed          | rpm            | 11          |
|           | Grade ability            | °              | 35(70%)     |
|           | Ground pressure          | kPa            | 62.7        |
|           | Max.Traction force       | kN             | 283         |
| Engine    | Engine model             | —              | L9          |
|           | Rated power              | kW/rpm         | 209/2100    |
|           | Max.Torque               | Nm/rpm         | 1472/1400   |
|           | Displacement             | L              | 8.9         |
|           | Fuel tank                | L              | 600         |
| Hydraulic | Max.Flow(total)          | L/min          | 288×2       |
|           | Max.Working pressure     | MPa            | 34.3        |
|           | Max.Pilot pressure       | MPa            | 3.9         |
|           | Max.Arm digging force    | kN             | 170         |
|           | Max.Bucket digging force | kN             | 220         |
|           | Hydraulic oil tank       | L              | 300         |
| Chassis   | Track width              | mm             | 600         |
|           | Track shoes number       | —              | 47×2        |
|           | Carrier rollers number   | —              | 2×2         |
|           | Track rollers number     | —              | 8×2         |
| Electric  | System vottage           | V              | 24          |
|           | Battery capacity         | V/Ah           | 24/165×2    |

## PRODUCT FEATURES

|                                                                                 |
|---------------------------------------------------------------------------------|
| Cummins engine. Emission standard meets EPA Tier 4F and EU stage V.             |
| Optimized Cooling System to Reduce Power Loss and Noise                         |
| Advanced Control System                                                         |
| Combined C type closed frame improves rigidity and strength of rotary platform. |
| Comfortable ROPS Cabin with 2.7m <sup>3</sup> Operational Space                 |
| No Frame Cab Glasses to Enlarge Operation Field of View                         |
| Rock Track Shoes, Chassis Reinforcement, More reliable and Wear-resistant       |
| Heavy-duty Working Device with High Strength Low Alloyed Steels                 |

## OPTIONAL

|                            |
|----------------------------|
| Aux piping                 |
| Work warning light         |
| Travelling alarm           |
| Top cab guard              |
| Front cab guard            |
| 700mm triple grouser shoes |
| 800mm triple grouser shoes |

# RJB Heavy Industries Ltd.

Mailing Address: #133 8 - 6014 Vedder Rd, Chilliwack, BC V2R5P5

Canada Office: + 1 604 807 0195 WhatsApp/Cellular: + 1 604 789 0195 E: info@rjbhi.com W: rjbhi.com