



JB2200S

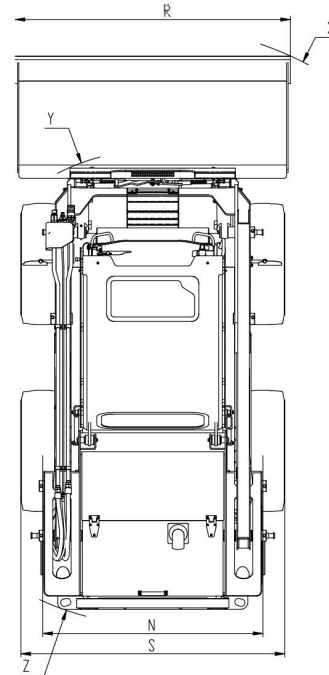

PRODUCT SPECIFICATIONS

Working height-full lift (A)	4350 (mm)	Articulation height-full lift (B)	3400 (mm)
Bucket bottom height-full lift (C)	3200 (mm)	Height of overhead guard (D)	2120 (mm)
Total length-with bucket (E)	3800 (mm)	Overall length-without bucket (F)	3030 (mm)
Flip down angle-full lift (G)	38 (°)	Discharge height-full lift (H)	2660 (mm)
Discharge distance-full lift (J)	390 (mm)	Inclination angle - full lift (K)	96 (°)
Upward inclination angle (L)	24 (°)	Wheel base (M)	1280 (mm)
Wheel base (N)	1520 (mm)	Ground clearance (P)	190 (mm)
Departure angle (Q)	20 (°)	Bucket width (R)	1880 (mm)
Overall width-without bucket (S)	1850 (mm)	Tail length (W)	1100 (mm)
Turning radius-with bucket (X)	2300 (mm)	Turning radius-without bucket (Y)	1450 (mm)
Turning radius-tail (Z)	1850 (mm)		

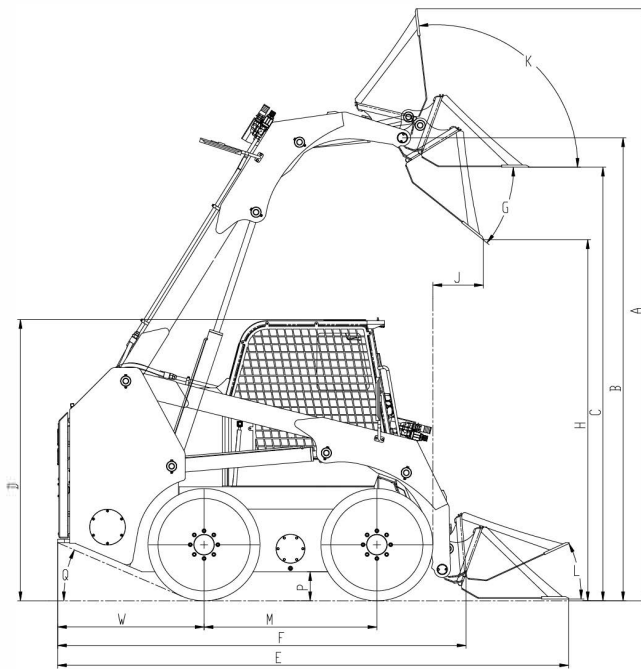

ENGINE

Brand	YANMAR
Power	53.7kW Certified EPA Tier4F & Euro Stage 5 compliant.
Number of cylinders	4
Fuel	Diesel fuel

HYDRAULIC ELECTRICAL SYSTEM

Standard hydraulic flow rate of attachments	85 (L/min)
Optional high hydraulic flow	135 (L/min)
Maximum oil supply pressure for accessories	21 (Mpa)
Fuel tank capacity	100 (L)
Hydraulic oil tank capacity	100 (L)
Operating voltage	DC12 (V)

Operation method	Pilot hydraulic control
------------------	-------------------------

BASIC TECHNICAL PARAMETERS

Rated load	1100 (kg)
Tipping load	2200 (kg)
Operating weight	3480 (kg)
Standard single speed driving	12.5 (km/h)
Optional dual-speed driving	12/23 (km/h)
Tire specifications	12-16.5
Standard bucket	72"
Bucket width	1880 (mm)
Flat pack capacity	0.44 (m ³)

RJB Heavy Industries Ltd.

Mailing Address: #133 8 - 6014 Vedder Rd, Chilliwack, BC V2R5P5
 Canada Office: + 1 604 807 0195 WhatsApp/Cellular: + 1 604 789 0195
 E: info@rjbhi.com W: rjbhi.com

