



The JB30:8 telehandler is specifically coordinated with its combination of lift height, width and machine performance. With its all-wheel drive and swingable chassis, it is absolutely stable and well equipped for many different work tasks. When developing our telescopic handlers, we placed particular value on very good all-round visibility for the driver.

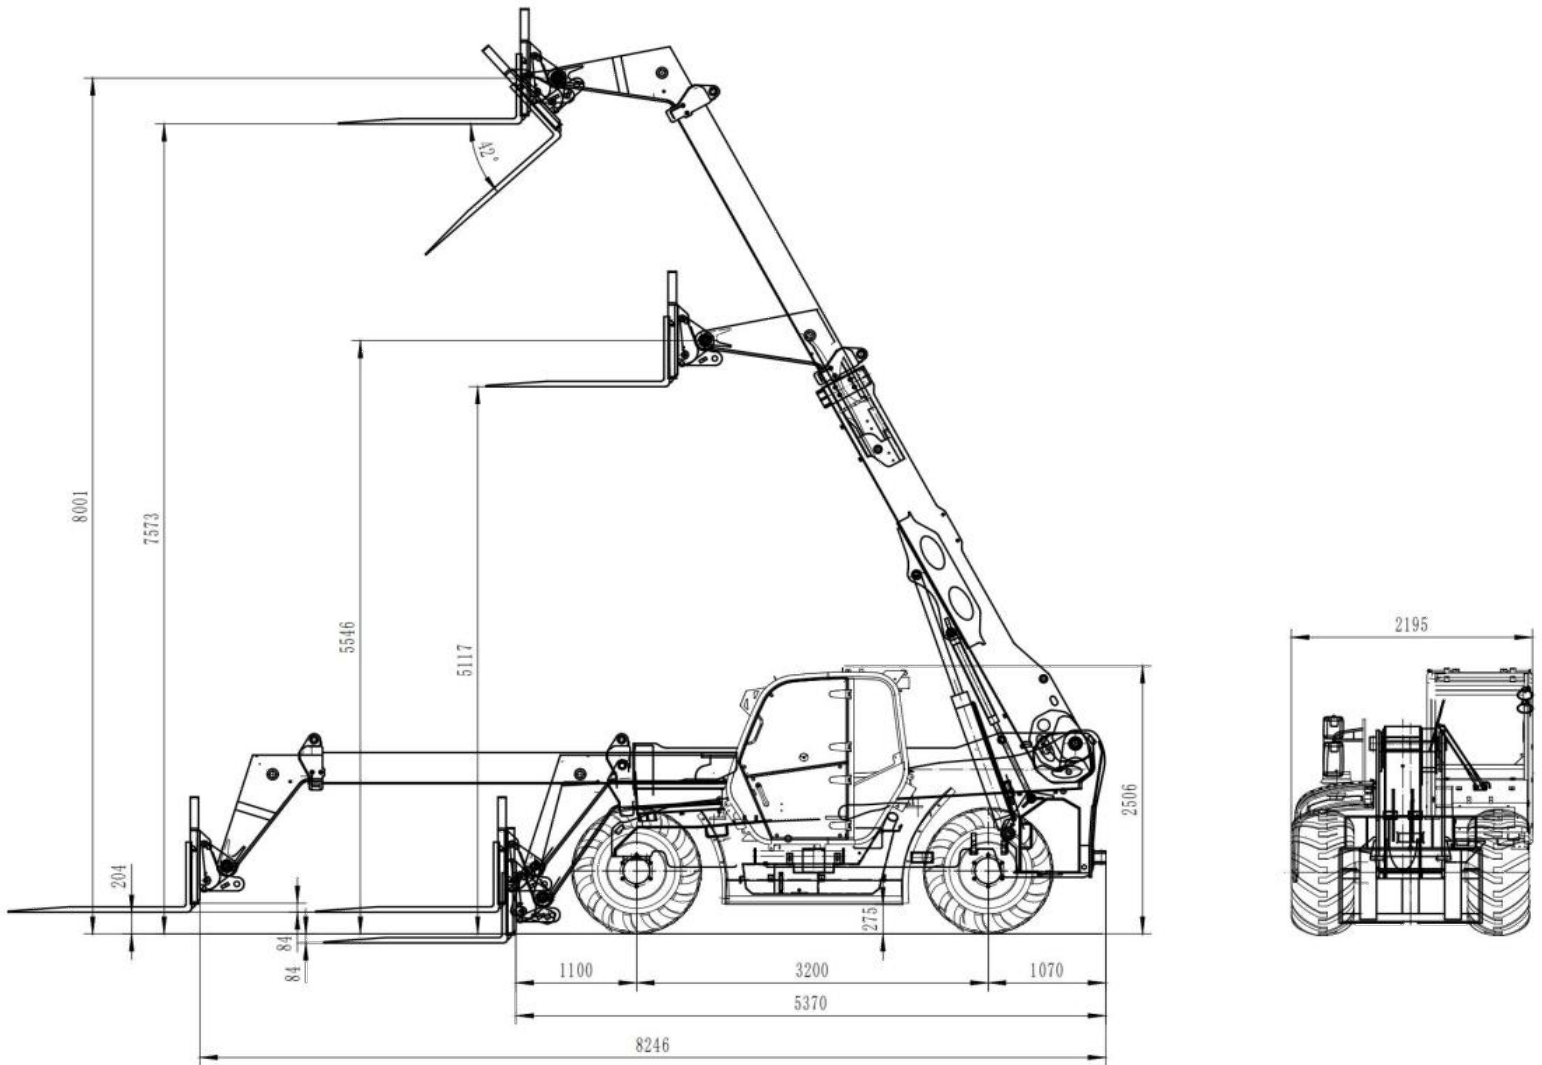


Features

- Pilot-electrical joystick control all movements by one hand.
- Hydraulic quick hitch and front hydraulic output make attachments exchanging quick and easy.
- The electro-hydraulic proportional control for the working system.
- Front frame leveling function/swingable chassis.
- Radio with USB and Bluetooth.
- Safe load indicator.
- Quick hitch as standard.
- Cabin doors can be opened up and down separately.
- Three wipers for front, top and openable rear windshield windows
- Hydraulic oil cooler, hydraulic converter cooler and radiator combine together to ensure a long working day with no overheating issues.

Due to ongoing research and development and our commitment to providing the best possible equipment some specs and details may change without notice.

JB30:8 Dimensions



RJB Heavy Industries Ltd.

Mailing Address: #133 8-6014 Vedder Rd,
Chilliwack, BC V2R5P5 Canada
Office: + 1 604 807 0195
WhatsApp/Cellular: + 1 604 789 0195
info@rjbhi.com

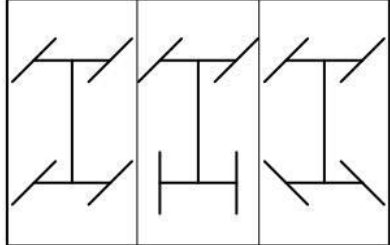
Performance		
Lifting capacity		3000kg
Max. height to pin		8000mm
Weight		7700kgs (without bucket)
Dimensions	Max. length without fork	5430mm
	Max. width	2195mm
	Max. height to top of cabin	2600mm
Forks	Length x Width x Thickness	1850mm*1300mm*50mm
	Carriage rotation	42°
Performance time	Boom raise	11.5s
	Boom lower	9.0s
	Boom extend	11.0s
	Boom retract	11.0s
	Crowd	4. s
	Dump	3.5s
Tires		16/70-24
Driving Brake		disc brake
Transmission		Torque converter
Max. Speed		34 km/h
Number of gears (forward/reverse)		4/ 4
Gearshift		Electrohydraulic control + Mechanical
Driving		4 wheel driving
Turning angel		27°
Track		1760mm
Wheelbase		3200mm
Hydraulics	System pressure	28Mpa
	Hydraulic output	117L/min
Oil Tank Capacity	Fuel tank	180L
	Hydraulic Oil tank	160L

Due to ongoing research and development and our commitment to providing the best possible equipment some specs and details may change without notice.

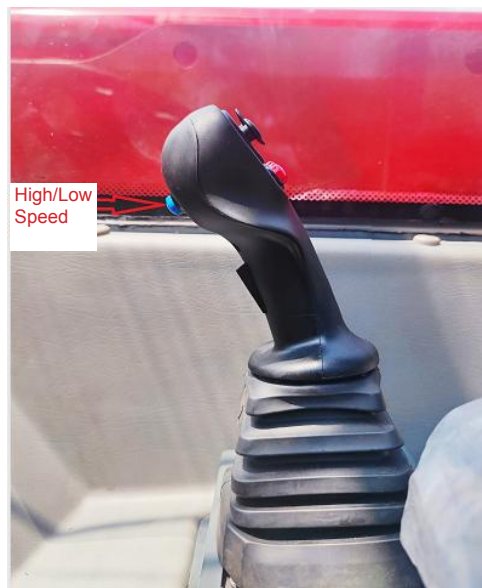
JB30:8 Engine Specifications

Engine Model	Yanmar 4TNV98CT
Emission Standard	EPA Tier 4 / Euro Stage V
Engine Power	53.7kw(73HP)
Rated Speed	2500 r/p.min
Engine Cooling Way	Water cooling
Engine Type	4 cycle diesel

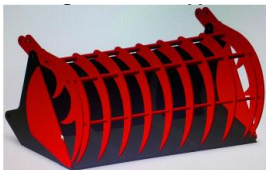

JB30:8 STANDARD EQUIPMENT

A/C system with 7 vents	Adjustable steering wheel	HD rear view camera
		
Quick hitch	Bucket	3 Steer modes
		
Pilot joystick	Torque limiter & Multifunctional display	16/70-24 OTR Tires
		

Multifunctional Pilot Joystick:



Attachments available for JB30:8

Standard bucket standard 	4 in 1 bucket 	Silage bucket grapple 	Pallet Fork with Tines 	
Pallet fork 	Pallet fork B 	Hydraulic adjustable fork 	Grapple Forklift 	Bale grabber 
Hay fork 	Bale fork 	Silage Bale Fork 	RJB Heavy Industries Ltd. Mailing Address: #133 8-6014 Vedder Rd, Chilliwack, BC V2R5P5 Canada Office: + 1 604 807 0195 WhatsApp/Cellular: + 1 604 789 0195 info@rjbhi.com	