


JB27CR



RJB Heavy Industries Ltd.

Mailing Address: #133 8-6014 Vedder Rd,
Chilliwack, BC V2R5P5 Canada
Office: + 1 604 807 0195
WhatsApp/Cellular: + 1 604 789 0195
info@rjbhi.com
rjbhi.com

■ OPERATING WEIGHT:	2650kg
■ ENGINE POWER:	14.6kW
■ BUCKET CAPACITY:	0.08m ³
■ TRAVEL SPEED:	2.6/4.4km/h

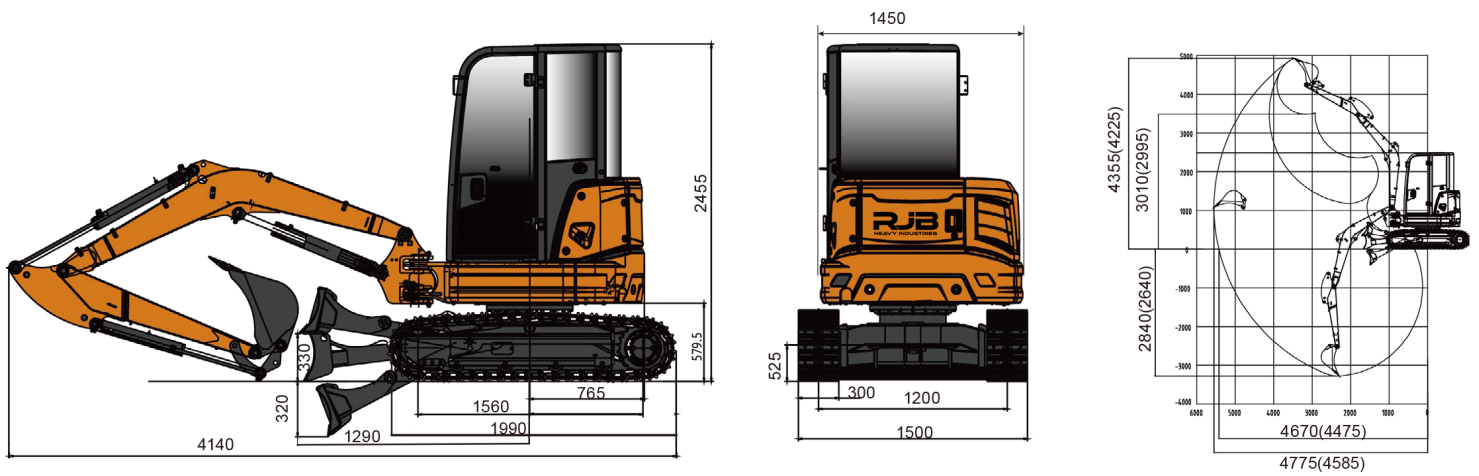

TECHNICAL PARAMETERS

	Name	Data
Basic	Operating weight	2650 kg
	Standard bucket Capacity	0.08 m³
	Standard bucket Width	580 mm
	Max.Travel speed	2.6/4.4km/h
	Max.Swing speed	10 rpm
	Grade ability	30°
	Ground pressure	25.1 kPa
	Max.Traction force	30.7 KN
	Boom swing angle (L/R)	65°/50°
Engine	Engine brand	YANMAR
	Engine model	3TNV80-PSU
	Rated power	14.6 kW/2400 rpm
	Displacement	1.267 L
	Fuel tank	26 L
Hydraulic	Max.Flow(total)	2×28.8+19.2+6.5 L/min
	Max.Working pressure	23.5 MPa
	Max.Pilot pressure	3.2 Mpa
	Max.Arm digging force	14 (15.8) kN
	Max.Bucket digging force	24 kN
	Hrdraulic oil tank	41 L
Chassis	Track width	300 mm
	Track type	Rubber tracks
	Carrier rollers number	1 (each side)
	Track rollers number	4 (each side)
Electric	System voltage	12 V
	Battery capacity	12 V, 45 Ah

PRODUCT FEATURES

Yanmar Engine. Meets emission standards, EPA Tier4F and EU Stage V.
The combination of zero-tail swing and boom deviation is designed for narrow and complicated working scenarios.
Wider space and view are provide by enlarged front windscreen and sunroof.
Color monitoring digital and analogue combined display
The door and hood can be opened completely to ensure easy and convenient maintenance.

STANDARD EQUIPMENT

Fops/Tops cabin
Suspension seat
Warm air blower
Hydraulic pilot control
Deflectable boom
Warning light
Aux Piping

OPTIONAL EQUIPMENT

Electro-hydraulic proportional joystick
Front Cab Guard
Fops/Tops canopy
300mm width bucket
1000mm width bucket
Quick hitch pipeline
300mm steel crawler

RJB Heavy Industries Ltd.

Mailing Address: #133 8 - 6014 Vedder Rd, Chilliwack, BC V2R5P5

Canada Office: + 1 604 807 0195 WhatsApp/Cellular: + 1 604 789 0195 E: info@rjbhi.com W: rjbhi.com