

JB17CR



RJB Heavy Industries Ltd.

Mailing Address: #133 8-6014 Vedder Rd,
Chilliwack, BC V2R5P5 Canada



Office: + 1 604 807 0195

WhatsApp/Cellular: + 1 604 789 0195

info@rjbhi.com

rjbhi.com

■ OPERATING WEIGHT:	1700kg
■ ENGINE POWER:	11.8kW
■ BUCKET CAPACITY:	0.04m ³
■ TRAVEL SPEED:	2.3/4.0km/h

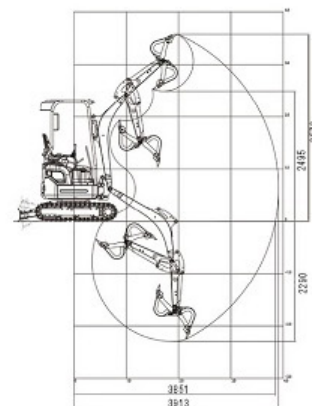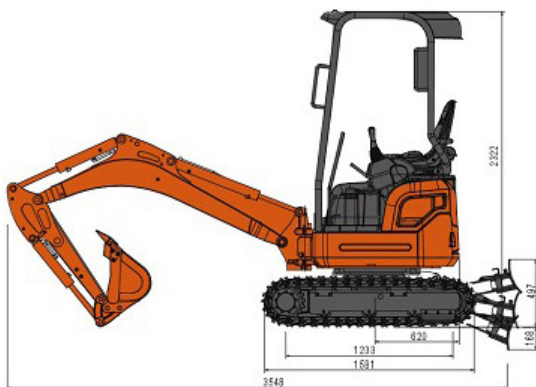

TECHNICAL PARAMETERS

Name		Data
Basic	Operating weight	1700 kg
	Boom length	1830 mm
	Arm length	950 mm
	Standard bucket	0.04 m ³
	Max.Travel speed	2.3/4.0 km/h
	Max.Swing speed	10 rpm
	Grade ability	35°(70%)
	Ground pressure	25 kPa
	Max.Traction force	15.6 kN
Engine	Engine model	D902-E4B-CBH-1
	Rated power	11.8 kW/2300 rpm
	Max.Torque	44.5/1800 N.m/rpm
	Displacement	0.898 L
	Fuel tank	17 L
Hydraulic	Max.Flow(total)	64.4 L/min
	Max.Working pressure	21.6 MPa
	Max.Pilot pressure	3.9 Mpa
	Max.Arm digging force	8.8 kN (ISO)
	Max.Bucket digging force	15.2 kN (ISO)
	Hydraulic oil tank	18 L
Chassis	Track width	230 mm
	Track shoes number	37 (each side)
	Carrier plates number	2 (each side)
	Track rollers number	3 (each side)
Electric	System voltage	12 V
	Battery capacity	12 V, 45 Ah

PRODUCT FEATURES

Kubota engine. Meets emission standards, EPA Tier4F and EU Stage V.

Single pump load sensitive pressure compensation system, fast speed, coordinated action, and high efficiency

Zero tail swing, movable boom.

Equipped with hammer pipeline and reserve spare valve.

Detachable split type canopy for different working conditions.

Retractable chassis, good trafficability and more stable.

OPTIONAL

600mm width cleaning bucket

1000mm width cleaning bucket

Rubber track/Steel track

Quick coupler

RJB Heavy Industries Ltd.

Mailing Address: #133 8 - 6014 Vedder Rd, Chilliwack, BC V2R5P5

Canada Office: + 1 604 807 0195 WhatsApp/Cellular: + 1 604 789 0195 E: info@rjbhi.com W: rjbhi.com